



Grippers | Parallel grippers

Parallel grippers – compact

Parallel grippers – compact




Product notes

- > Double acting
- > Simple installation and adjustment of the sensors (not included in scope of delivery)
- > Large gripper stroke relative to gripper size
- > Robust design, long life and high reliability, maintenance-free
- > Compressed air connection - M5
- > Housing and jaws made of an anodized, high-strength aluminum alloy
- > Long lifetime due to special wear-resistant seals

Technical data

Item no.	GR04.151
Principle of operation	double-acting
Operating pressure [bar (psi)]	3 - 7 (43.5 - 101.5)
Piston diameter [mm]	16
Stroke per gripper jaw [mm]	4
Closing force at 6 bar (87 psi) [N]	102
Opening force at 6 bar (87 psi) [N]	113
Air consumption per cycle [cm ³]	1.76
Cycle time [Hz]	1.7
Max. operating temperature [°C (°F)]	-10 - 60 (14 - 140)
Weight [g]	49
Accessories	Air connection 30.200, Air connection 30.923, Mounting bracket: GR04.189, Sensor: GS04.007, Sensor: GS04.008

Application example

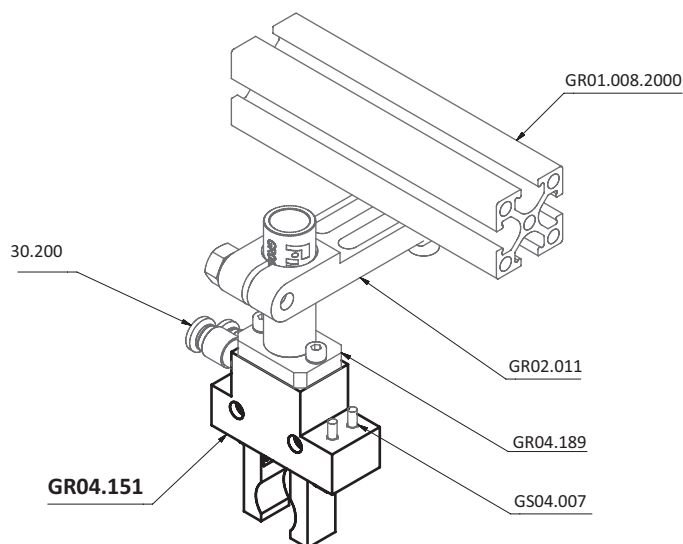



Dimensions

